



NeoCD3.5H True Ribbon Tweeter


FEATURES

- strong Neodymium magnet
- 3 inch enforced sandwich diaphragm
- build-in impedance convertor
- low distortion, very fast transition

Parameter	
Sensitivity	95.5dB/1m/2.83v
Power handling	12W nominal, 25W max
Frequency range	1,100-30,000Hz
Nominal impedance	7 ohm
DCR	0.02 ohm
Ribbon dimension	9mmX60mmX0.015mm
Effective ribbon area	360 square millimeter
Ribbon weight	30 milligram
Gap flux	0.5 Telsa average
Gap height	4 millimeter
Recommend crossover frequency	2,500Hz with 3-order
Net. Weight	520 gram




SPL vs Freq

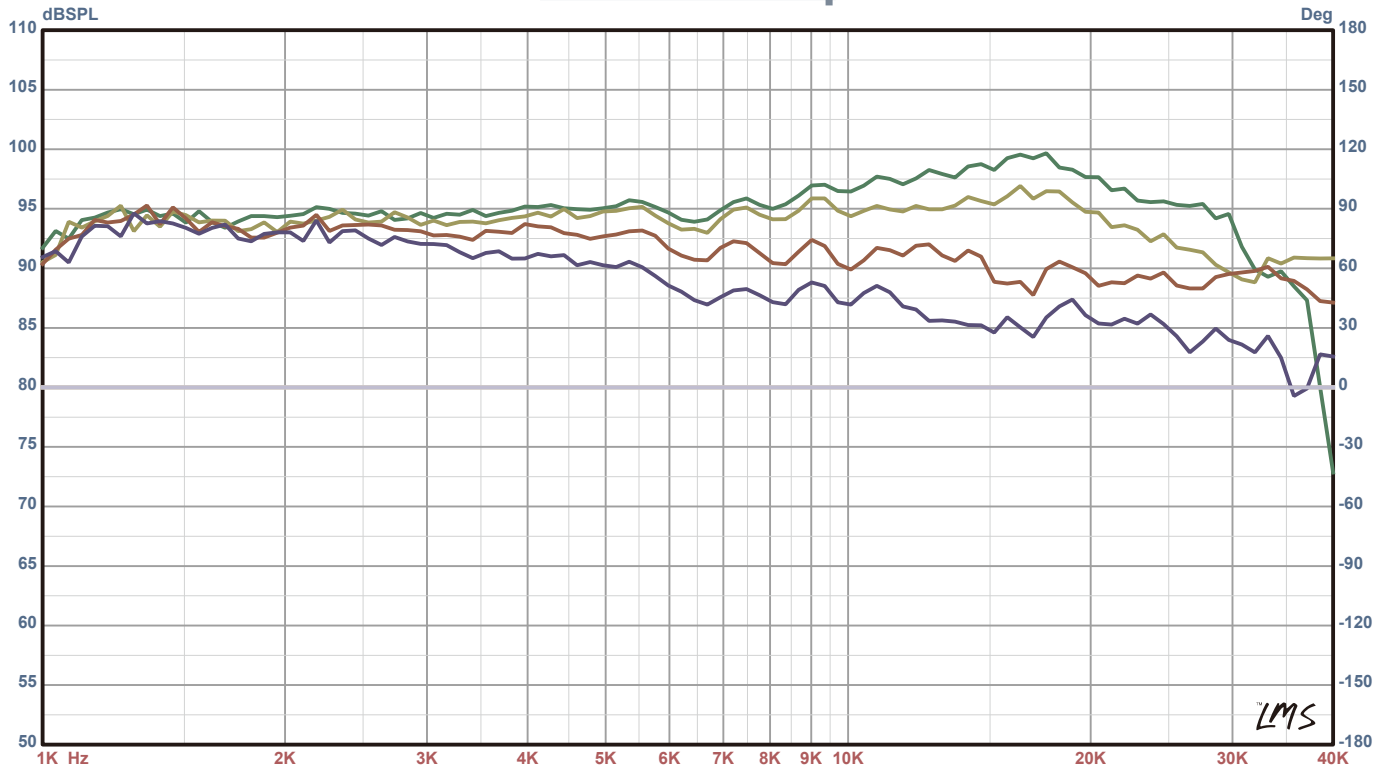

horizontal diffusion: on-axis, 15 degree , 30 degree, 45 degree

SPL vs Freq

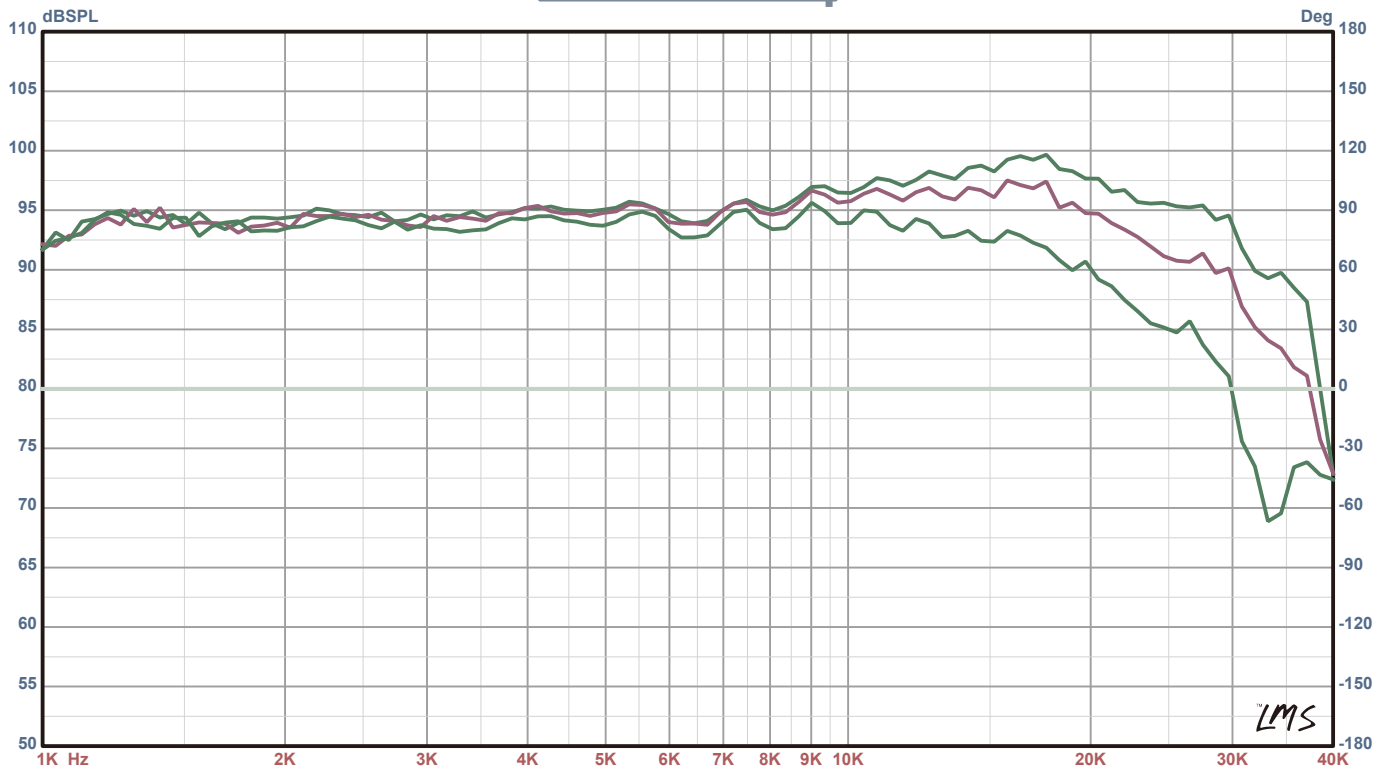

vertical diffusion: on-axis, 5 degree , 10 degree

