


Application Notes: SLS Subwoofer 830667

Driver Highlights: Coated paper cone, 39 mm voice coil, AL shorting ring in magnet system.


Tuning a Sealed Box

BOX PROPERTIES		
Alignment	Sealed box	
DRIVE UNIT	830667	
Box Volume	25	Ltr.
Fill	65	%
f_{-3dB}	55.43	Hz

Frequency response : Half Space (2 π) 1m distance

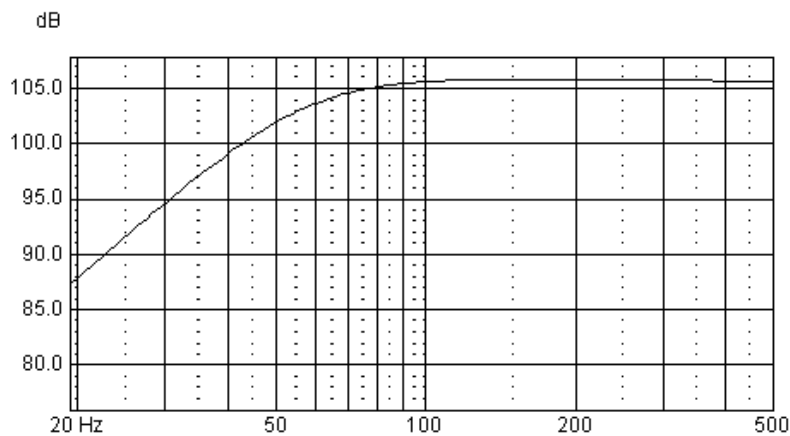


Impedance

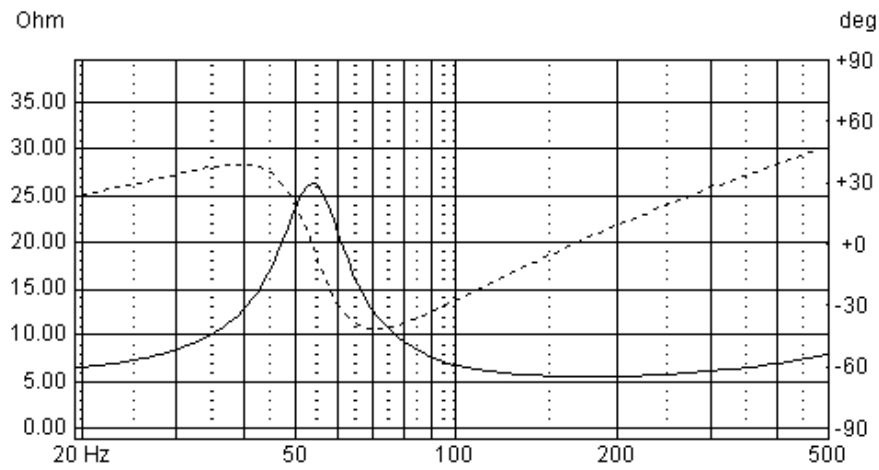

Excursion

mm p-p

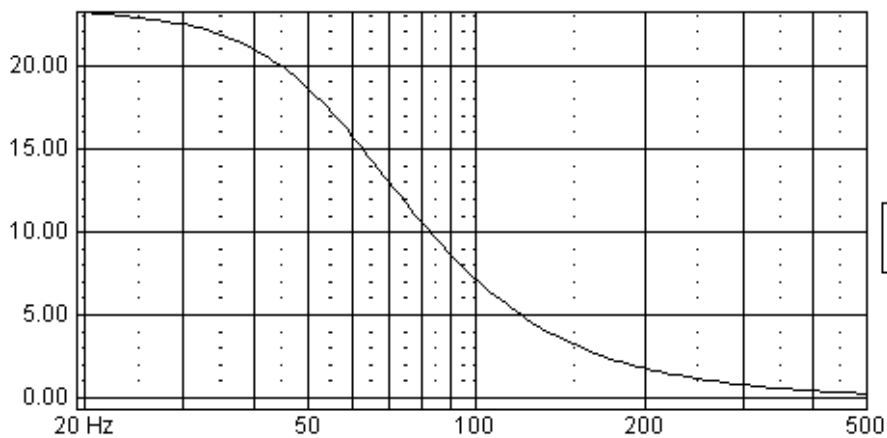

Source level: 22.0 V_{rms}

Transient Response: Impulse

