


Application Notes: SLS Subwoofer 830668

Driver Highlights: Coated paper cone, 39 mm voice coil, AL shorting ring in magnet system.


Tuning a Sealed Box

BOX PROPERTIES		
Alignment	Sealed box	
DRIVE UNIT	830668	
Box Volume	42	Ltr.
Fill	65	%
f_{3dB}	52.7	Hz

Frequency response : Half Space (2 π) 1m distance

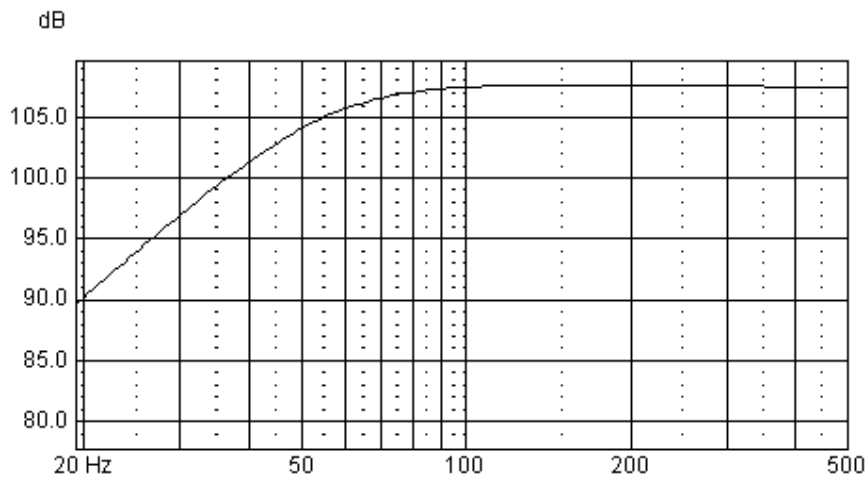


Impedance

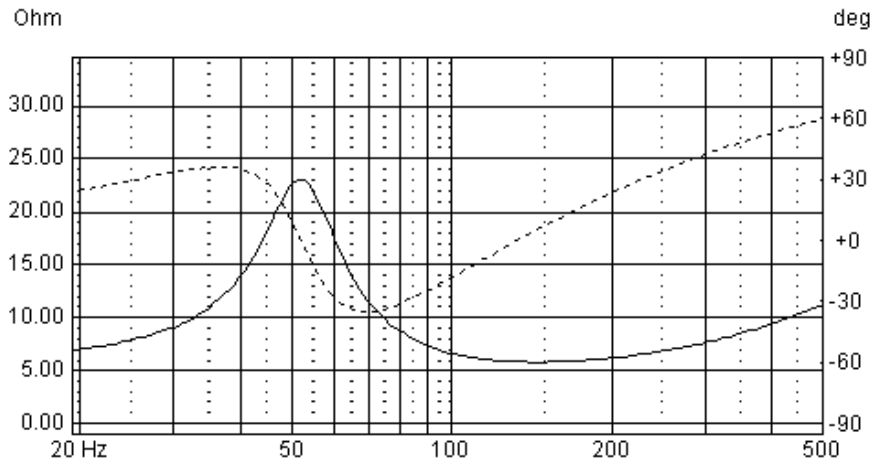

Excursion

mm p-p

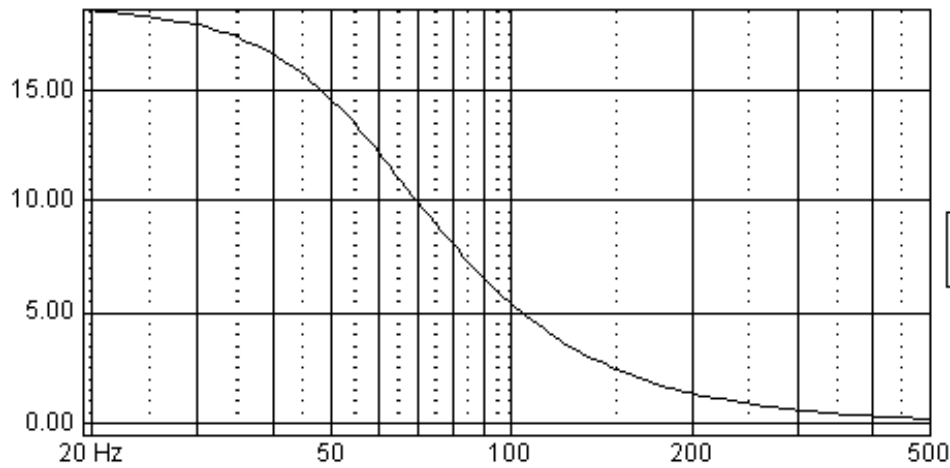

Source level: 22.0 V_{rms}

Transient Response: Impulse

