


## Application Notes: SLS Subwoofer 830669

Driver Highlights: Coated paper cone, 39 mm voice coil, AL shorting ring in magnet system.


### Tuning a Sealed Box

<b>BOX PROPERTIES</b>		
<b>Alignment</b>	Sealed box	
<b>DRIVE UNIT</b>	830669	
<b>Box Volume</b>	70	Ltr.
<b>Fill</b>	65	%
<b><math>f_{-3dB}</math></b>	49	Hz

### Frequency response : Half Space (2 $\pi$ ) 1m distance

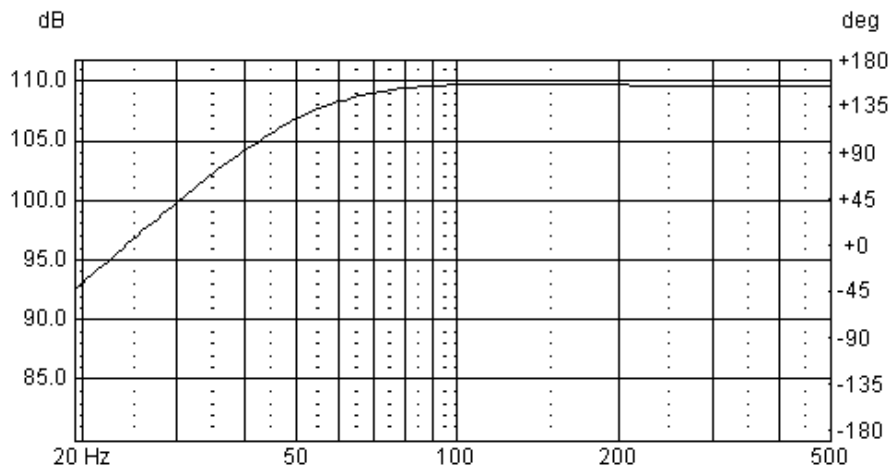


## Impedance

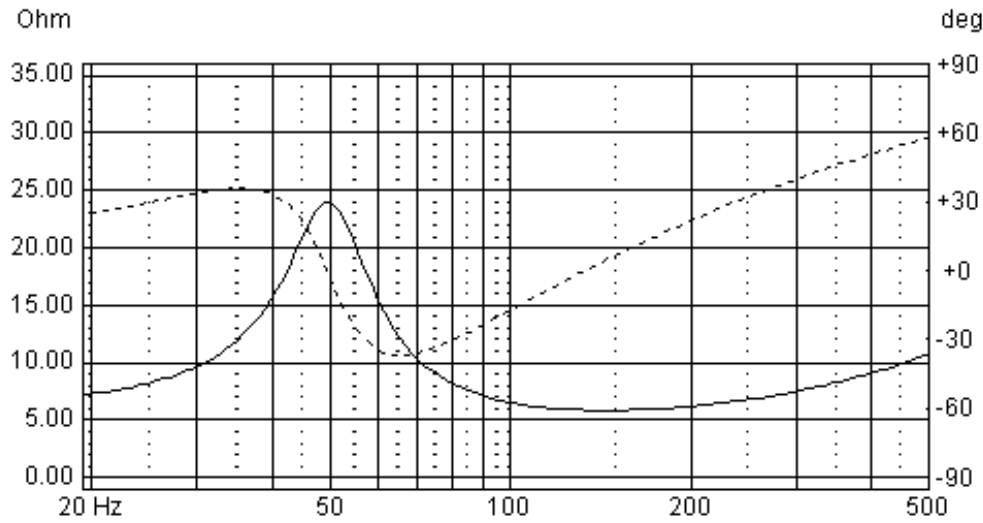

## Excursion

mm p-p

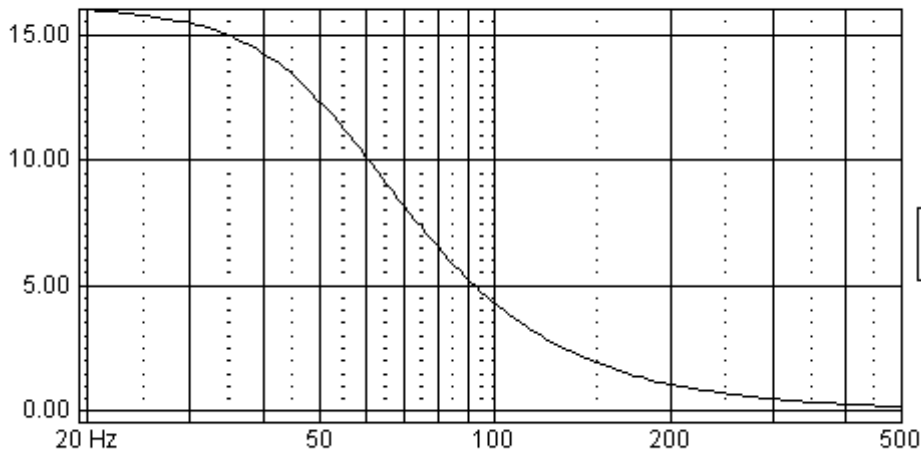

Source level: 22.0 V<sub>rms</sub>

## Transient Response: Impulse

